Tolerance unspecified
mm (inch)
X.XXX ±0.1 (0.004)
X.XX ±0.25 (0.010)
X.X ±0.5 (0.02)
X. ±1.0 (0.04)
ANGULAR ± 2°

3.2

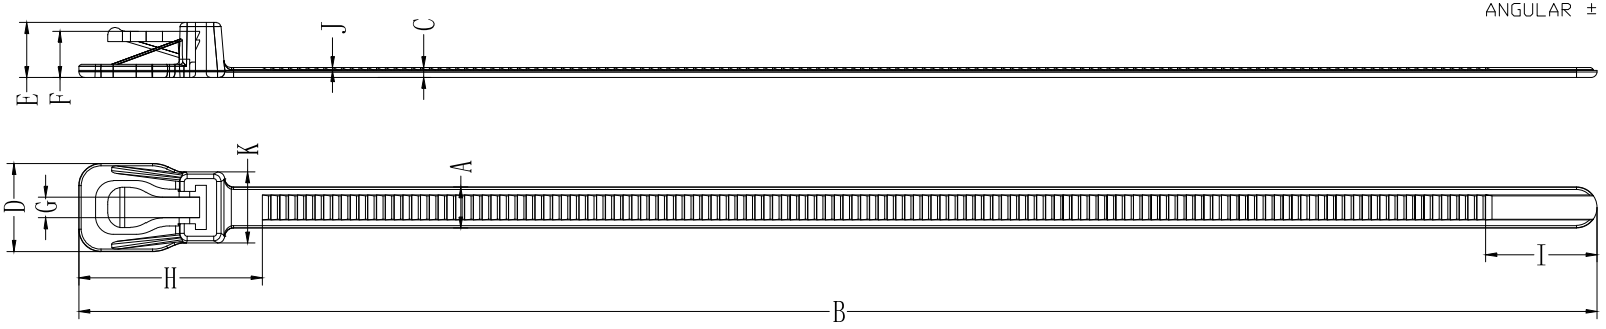

Part Number	Size	A	B	C	D	E	F	G	H	I	J	K	Bundle Diameter		Tensile
													Min	Max	
EVT-S06	4.8x150	4.80	150	1.20	11.60	7.35	6.15	2.50	25.00	14.80	0.40	9.30	5.00	33.00	50
EVT-S08	4.8x200	4.80	203	1.25	11.60	7.40	6.20	2.50	25.00	14.80	0.40	9.30	5.00	55.00	50
EVT-S10	4.8x250	4.80	254	1.30	11.60	7.45	6.25	2.50	25.00	14.80	0.40	9.30	5.00	71.00	50
EVT-S12	4.8x30	4.80	304	1.30	11.60	7.45	6.25	2.50	25.00	14.80	0.40	9.30	5.00	87.00	50
EVT-S14	5.6x360	5.60	356	1.35	12.00	7.50	6.30	3.60	24.50	15.20	0.40	9.70	5.00	100.00	50
EVT-S16	5.6x400	5.60	406	1.35	12.00	7.50	6.30	3.60	24.50	15.20	0.40	9.70	5.00	119.00	50
WKT-S14	7.6x360	7.60	360	1.35	14.40	8.30	7.00	4.00	26.50	18.00	0.50	12.00	7.00	101.00	120
WKT-S18	7.6x460	7.60	457	1.55	14.40	8.30	7.00	4.00	26.50	18.00	0.50	12.00	7.00	132.00	120
WKT-S24	7.6x610	7.60	610	1.55	14.40	8.30	7.00	4.00	26.50	18.00	0.50	12.00	7.00	181.00	120
PRT-S32	9x810	9.00	810	1.75	15.80	9.00	7.40	5.40	28.50	26.00	0.50	14.00	9.00	245.00	175
PRT-S36	9x920	9.00	920	1.75	15.80	9.00	7.40	5.40	28.50	26.00	0.50	14.00	9.00	280.00	175

1. Material Natural: Polyamide 6.6 Natural
2. Material Black: Polyamide 6.6 + 1% carbon black
3. Flammability of raw material: UL 94V-2
4. Humidity absorption: 2.7% - 2.8% (23°C – 50% R.H.)
5. Installation temperature: 0°C – 85°C
6. Working temperature: -40°C – 85°C
7. Max sustainable temperature for short time: +110°C
8. Good resistance to bases, oils, grease, oil derivates, chloride solvents. Limited resistance to acids. Not resistant to phenols.
9. Carbon black additive gives better UV resistance

RETYZ

RETYZ Releasable Cable Ties

1

UNIT:MM

rev1.0

6/8/2022